



### **CSX810T** stainless steel AISI 316L housing with *clean glass* system

- ✓ stainless steel AISI 316L housing
- ✓ weatherproof rating IP67
- ✓ slide opening system
- ✓ joint with 3rd axis for easier orientation
- ✓ protection system *clean glass* against deposit of dust on the front glass
- ✓ wall, ceiling, pole, corner mounting
- ✓ easy fastening and positioning
- ✓ wide range of accessories

**IP 67**  
STANDARD 



#### **AISI316L stainless steel housing**

The **CSX810T** is a cylindrical weatherproof housing, entirely made of AISI 316L stainless steel. The electropolishing treatment increases the corrosion resistance and makes the housing particularly indicated for installations in marine, industrial and chemical environments.

The front cover has got the exclusive system *clean glass* that ensures the maintenance of the front glass always free of any dust deposit. Specially indicated for installations inside tunnels where this problem is more prevalent.




It is supplied with a special joint, realized by Global Proof with an exclusive system that allows the third axis tilt: in this way it is possible to mount the housing also in an arched ceiling or on a wall that is not perpendicular to the ground.

The lightweight of this housing allows to mount it also in small pan-tilt systems.



# - DATA SHEET -

## camera housing



### Useful internal length

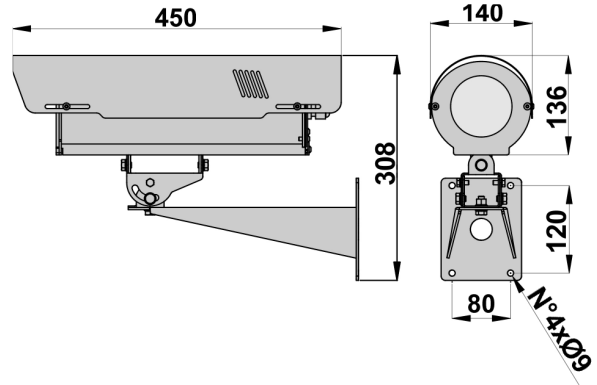

tilt to the left  
-45° max.



tilt to the right  
+45° max.

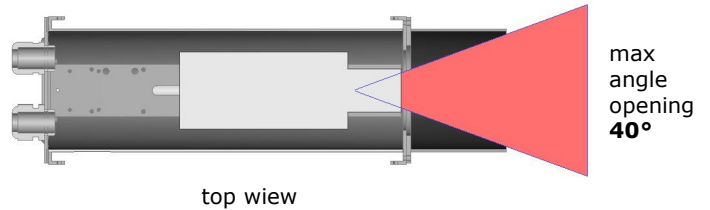

the values are in millimeters

## TECHNICAL DATA

### GENERAL

- body made in stainless steel AISI 316L
- sunshield in stainless steel AISI 316L with wide range of adjustment
- stainless steel A4 bolts and screws
- wall bracket made in stainless steel AISI 316L
- extractable slide-out body
- **clean glass** system that ensures the maintenance of the front glass always free of any dust deposit
- heater
- wide range of accessories
- supplied with instruction manual
- according to RoHS compliance

### ELECTRICAL

- heater 230-110, 24, 12 Vac  
consumption max. 30W  
t on 15°C t off 22°C +/- 3°C
- internal ventilation continuous cycle  
power voltage: 230V-110V, 24V, 12V  
consumption max. 1W

### MECHANICAL

- usable internal space 78x77mm.(BxH) or Ø 95
- useful length: 280mm
- glass window Ø 75mm.
- weatherproof rating IP67
- indoor/outdoor installations
- operating temperature with heater from -20°C to +60°C
- weight 5 Kg. (KIT version with wall bracket included)

### ACCESSORIES

- VI810** internal ventilation continuous cycle (pre-assembled)
- AL810/A** power supply 230/12Vdc 1,3A
- AL810/B** power supply 230/24Vac 500mA
- RD810** double heater for low temperatures until -45°C
- SNF800** adaptor plate for pan mounting

### RELATED PRODUCTS

- SP/C** pole adaptor AISI 316L
- SA/C** corner adaptor AISI 316L
- STS800** adaptor plate for ceiling mounting

code	unit weight (Kg.)	package dimensions (cm.) WxHxL	package weight (Kg.)
KIT CSX810T + ST800	5 (tot.)	19,0 x 15,0 x 46,0 19,0 x 15,0 x 46,0	5,40 (tot.)

Specifications are subject to change without notice, weights and dimensions are indicative.

rev.2814