

# SPC-1010

PTZ Control Keyboard




## Features

- Controls up to 255 PTZ cameras
- Superior system compatibility : Multi protocols supports
- OSD Menu, 3D joystick control
- RS-485 and RS-422 compatibility

## Dimensions

Unit : mm (inch)

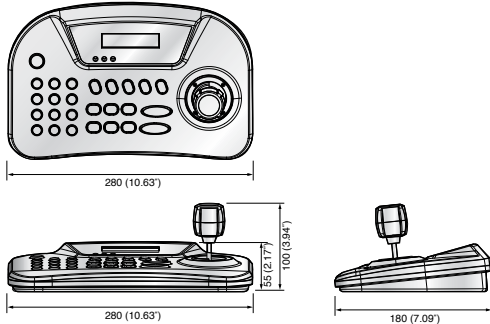

## Technical Specifications

		SPC-1010
LCD Display		16 x 2 character LCD
Speed Control		Joystick (3-axis twist zoom)
Compatible	PTZ Dome	Samsung-T PTZ Dome PELCO-D/P, Panasonic, Vicon, AD, Honeywell, Samsung-E
	Zoom Camera	SCZ-3430/2430/3250/2250/2370
Hardware	Receiver	SRX-100B
Control Capacity		Up to 255 Cameras (Suitable for Mid -, Large-size system)
Communications	Standards	RS-485 / RS-422 (Remote control : 1Km)
	Transfer Speed	2,400 ~ 57,600bps
Voltage		12V DC, 140mA
Operating Temperature		0°C ~ +45°C (+32°F ~ +113°F)
Operating Humidity		10% ~ 70%
Dimensions (WxHxD)		280 x 180 x 100mm (10.63" x 7.09" x 3.94")
Weight		Approx. 0.7Kg (1.54 lb) (Without adapter)

## System Configuration

